

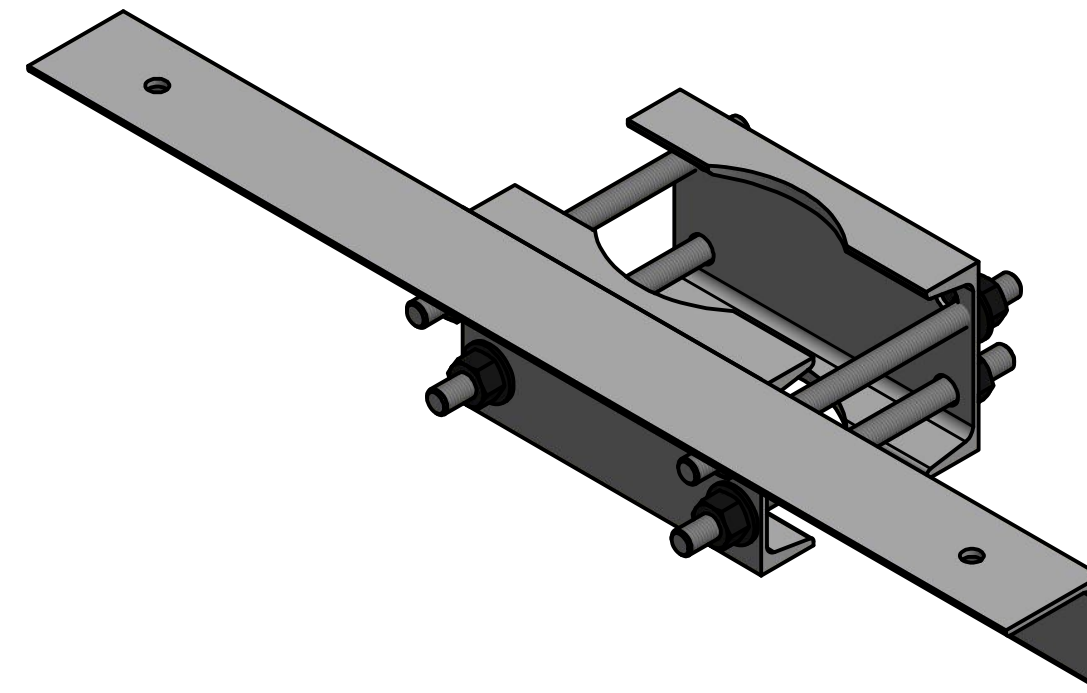
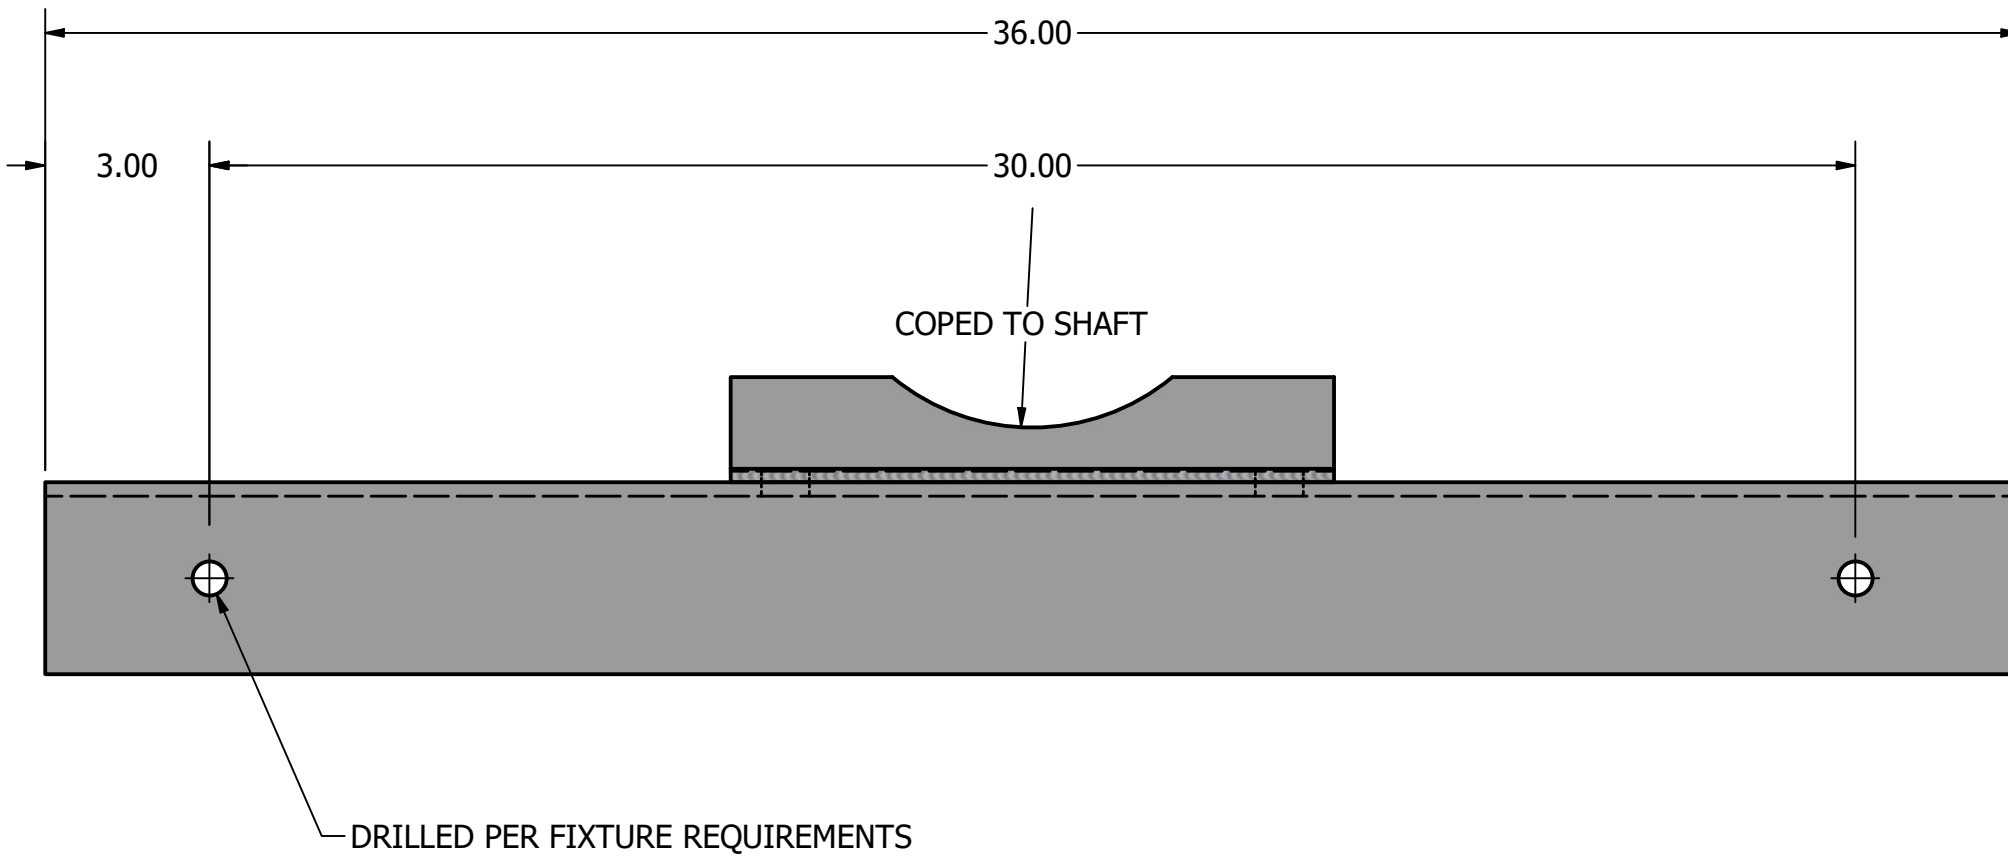


PXB BRACKET SPECIFICATIONS			
CATALOG #	# OF FIXTURES	EPA (SQ. FT.)	SHIPPING WT. (LBS)
PXB-2	2	1.05	26

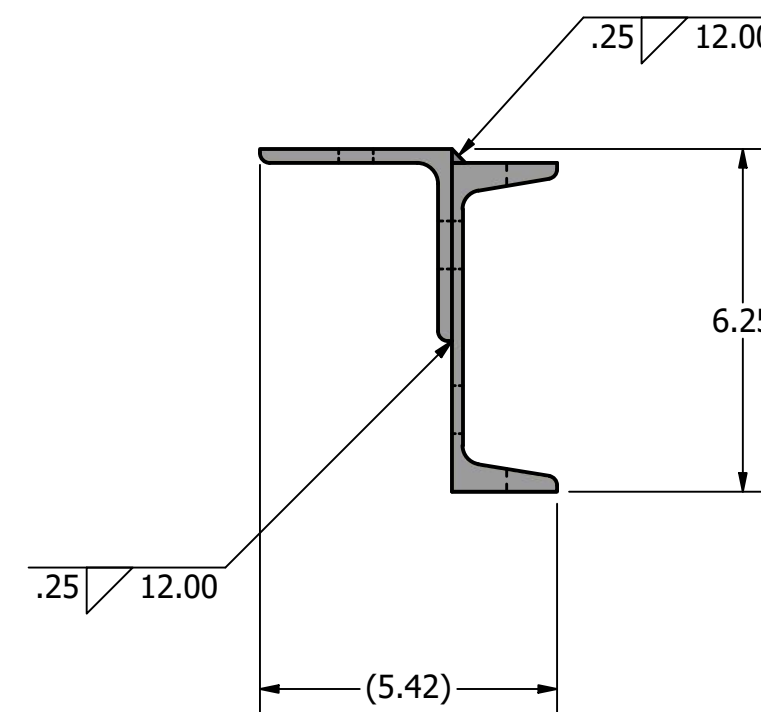

ISOMETRIC VIEW

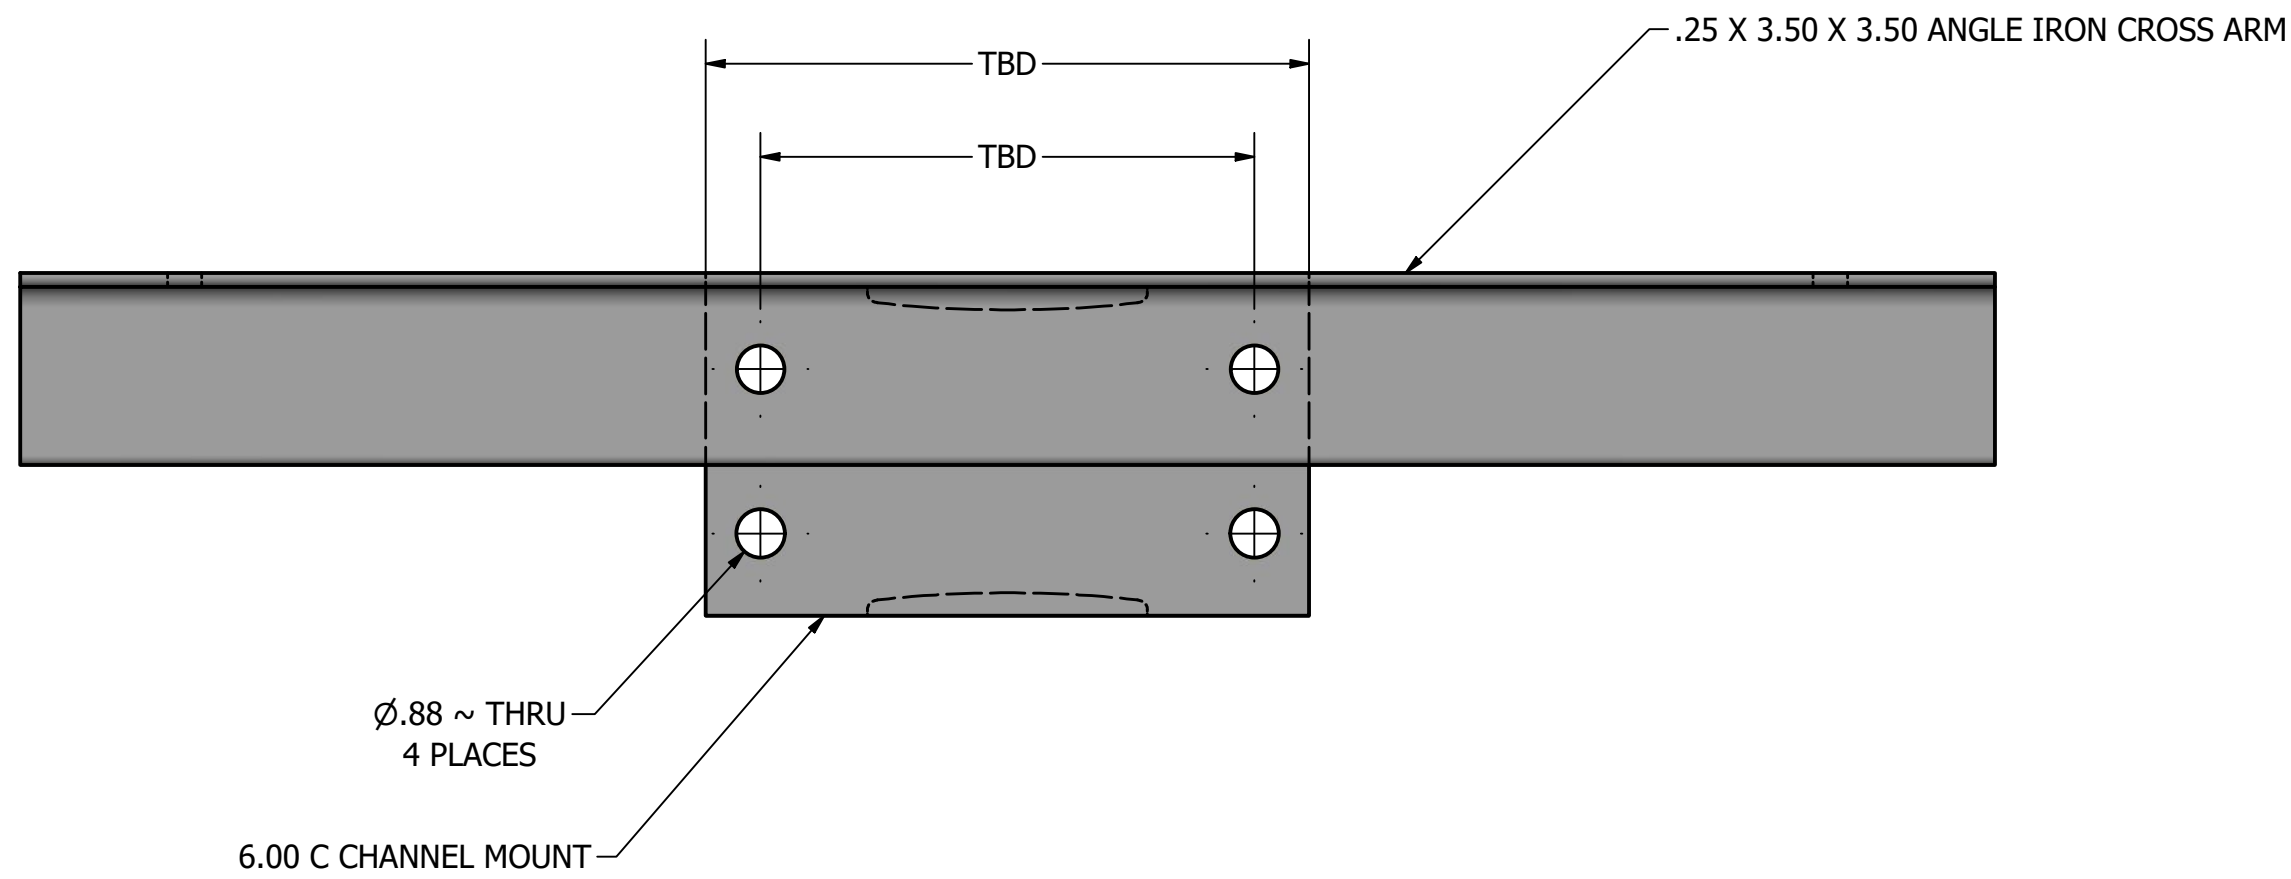

**NOTE:** THE C CHANNEL DIMENSIONS AND COPING IS DETERMINED ACCORDING TO THE POLE DIAMETER AT WHICH THE BRACKET WILL BE MOUNTED.

**NOTE:** PXB CROSS ARM BRACKETS ARE CONSTRUCTED WITH STRUCTURAL ANGLE IRON & C CHANNEL CONFORMING TO ASTM A-36 HRS SPECIFICATIONS. PXB BRACKETS ARE DESIGNED FOR DIRECT SIDE MOUNTING TO METAL POLES. BRACKETS COME WITH MOUNTING HARDWARE AND ARE FINISHED TO MATCH THE POLE.

SOME GEOGRAPHICAL AREAS HAVE SPECIAL WIND CONDITIONS THAT CAN CREATE WIND INDUCED VIBRATIONS CAUSING A FATIGUE PROBLEM. NO METHOD HAS YET BEEN FOUND FOR PREDICTING DESTRUCTIVE LIGHTNING POLE VIBRATION. THESE CONDITIONS ARE UNIQUE AND CANNOT BE GUARANTEED AGAINST, AND ARE THE RESPONSIBILITY OF A LOCAL SITE ENGINEER.

**WARNING: DO NOT INSTALL LIGHT POLE WITHOUT INTENDED LOADING.**

TITLE:  
 CATALOG:  
 DWG NO: PXB-2  
 SIZE: C  
 SHEET 1 OF 1

**GENERAL STRUCTURES INC.**  
 A DIVISION COMPANY

23171 Groesbeck Hwy.  
 Warren, MI 48089  
 P: (586) 774-6105 | F: (586) 774-5706  
 www.generalstructuresinc.com

DATE: 7/19/2021	DATE:	S.O. #
DRAWN: D. KONCHADA	REVISION:	APPROVAL SIGNATURE:
QUOTE:		

